




SL5 μ Smart Logger

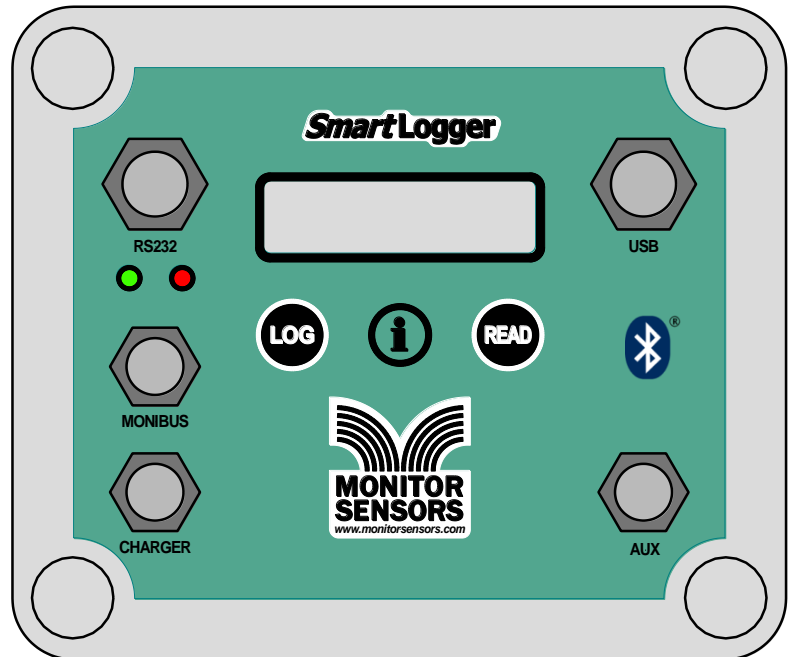

SL5 μ Smart Logger features

- 200 channel - 500,000 readings
- Independent sensor schedules – 1 per second to 1 per day
- Virtual sensors – cattle heat stress, accumulated heat stress, evapotranspiration, dew point, supply & bus voltage
- USB, RS232, Bluetooth, GPS interface
- Web reporter interface to Next G and satellite internet
- Internal 6 volt 7.2Ah battery
- Easy configuration – *plug & go*
- 1 μ S event synchronisation *with Garmin GPS*

MONITOR SENSORS (AUST) PTY LTD

ABN 98 077 697 986

info@monitorsensors.com

www.monitorsensors.com

MONITOR SENSORS

Unit 1 42 Cessna Drive

Caboolture QLD 4510

AUSTRALIA

The Logger

Monitor Sensors μ Smart Loggers employ a bus wiring system in which the logger and all the sensors share a common communication cable. Each sensor is identified by an address, a single number or letter. This permits the use of up to 62 alphanumeric sensors (numbers 0-9, A-Z, and a-z). If more than 62 sensors are required a logger option register can be set that allows 200 sensors to be installed. The address of a sensor must be unique and is displayed by the logger when displaying sensor data.

Every sensor is assigned a schedule identified by a single code letter. The logger uses the schedule to decide when to collect and store data from a sensor. For example schedule *m* will log sensor data every hour. Whenever a new sensor is added to the system, the logger will automatically assign a schedule, usually *m*. The schedule can be different for each sensor and may be changed at any time to a schedule more suited to the user's purpose.

The logged data is easily downloaded from the logger through a simple text menu system. The logger can communicate via RS232, USB or optionally Bluetooth. Remote communication is possible over satellite, mobile phone network, local radio link or wireless LAN by connecting the logger to external equipment. The downloaded data is formatted to allow easy analysis in a spreadsheet or database.

The sensors

All Monitor Sensors products communicate over a shared 3-wire communication bus at a baud rate of 1200. Each sensor has a built in menu system that allows the changing of many sensor parameters. Sensors respond to commands sent over the communication bus. The simplest commands allow the viewing of the current sensor reading. Other commands sent to the sensors consist of a combination of characters, which must be sent as a string without time gaps between characters.

Sensors can communicate with a PC when connected to a Monitor Sensors μ Smart Logger or when connected directly to a Monitor Sensors SI-8 interface.

Options

- Bluetooth SPP module
- GPS interface
-

SPECIFICATIONS

- Sensor Channels: 8
- Sensor log entries: 500,000
- Maximum log interval: 1 per day
- Minimum log interval: 1 second
- Temperature range: -20 ... 80°C
- Interface: Monibus serial data
RS232 1200 – 115000 baud (9600 default)
USB 2.0
Charger 8-24 Vdc 500mA
- Options:
- Internal battery: 6 volt 7.2 Ah SLA
- Monibus supply: 5.5 Vdc 80mA
- Weight: 2.0 kg
- Dimensions: 170 W x 135 H x 90 D mm
- Protection: IP65 with plugs in all sockets or dust caps in place